# SIEMENS

# Data sheet

# 3RK1304-5KS40-3AA0

ET 200PRO RSE HF REVERSING STARTER HIGH FEATURE MECH. SWITCHING; ELECTRO. UE PROTECTION; 3PH 400 V/0.9KW; 0.15A...2.00A WITHOUT BRAKE CONTACT 4DI 24 V DC; HAN Q4/2 -HAN Q8/0

General technical data:						
product brandname	SIRIUS					
Product designation	ET 200pro motor starters					
Design of the product	reversing starter					
Product function						
<ul> <li>Bus communication</li> </ul>	Yes					
• direct start	No					
<ul> <li>reverse starting</li> </ul>	Yes					
<ul> <li>on-site operation</li> </ul>	Yes					
<ul> <li>Short circuit protection</li> </ul>	Yes					
Design of the switching contact	electromechanical					
Product component Motor brake output	No					
Trip class	CLASS 10					
Type of assignment	1					
Product feature						
<ul> <li>brake control with 400 V AC</li> </ul>	No					
<ul> <li>brake control with 230 V AC</li> </ul>	No					
<ul> <li>brake control with 24 V DC</li> </ul>	No					
<ul> <li>brake control with 180 V DC</li> </ul>	No					

brake control with 500 V DC		No
Surge voltage resistance rated value	kV	6
maximum permissible voltage for safe isolation between main and auxiliary circuit	V	400
Equipment marking acc. to DIN EN 61346-2		Q
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		A
Mounting type		screw fixing
Depth	mm	150
Height	mm	230
Width	mm	110
Main circuit:		
Operating range relative to the operating voltage at AC at 50 Hz	V	200 440
Operating voltage at AC at 60 Hz acc. to CSA and UL rated value	V	600
Adjustable pick-up value current of the current- dependent overload release	A	0.15 2
Operating current at AC-3 at 400 V rated value	A	2
Operating power at AC-3 at 400 V rated value	W	900
Operating power for three-phase motors at 400 V at 50 Hz minimum	W	70
Operating power for three-phase motors at 400 V at 50 Hz maximum	W	900
Maximum short-circuit current breaking capacity (Icu) at 400 V rated value	A	100 000
Design of short-circuit protection		fuse
Number of poles for main current circuit		3
Type of the motor protection		solid-state
Mechanical service life (switching cycles) of the main contacts typical		30 000 000
Control circuit/ Control:		
Type of voltage of the control supply voltage		DC
Control supply voltage 1 at DC Final rated value	V	24
Control supply voltage 1 at DC rated value		
• minimum permissible	V	20.4
• maximum permissible	V	28.8
Supply voltage:		
Type of voltage of the supply voltage		DC
Supply voltage 1 at DC Final rated value	V	24
Supply voltage 1 at DC rated value		
• minimum permissible	V	20.4
maximum permissible	V	28.8

Ambient conditions:		
Protection class IP		IP65
Ambient temperature	_	
<ul> <li>during operation</li> </ul>	°C	-25 +55
<ul> <li>during storage</li> </ul>	°C	-40 +70
<ul> <li>during transport</li> </ul>	°C	-40 +70
Relative humidity during operation	%	5 95
Vibration resistance	_	2g
Shock resistance	_	15g / 11 ms
Degree of pollution	-	3
Installation altitude at height above sea level maximum	m	3 500
Mounting position	_	vertical, horizontal
Communication/ Protocol:		
Protocol is supported		
<ul> <li>PROFIBUS DP protocol</li> </ul>		Yes
<ul> <li>PROFINET protocol</li> </ul>		Yes
AS-interface protocol		No
Design of the interface PROFINET protocol	_	Yes
Type of electrical connection of the communication	-	via backplane bus
interface		
Connections/ Terminals:		
Number of digital inputs		4
Number of sockets		
<ul> <li>for digital input signals</li> </ul>		4
<ul> <li>for digital output signals</li> </ul>		0
Draduct function		
Product function		
<ul> <li>digital inputs parameterizable</li> </ul>		Yes
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul>	_	Yes No
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection		No
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul>	-	No M12 socket
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection	_	No M12 socket M12 socket
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> </ul>		No M12 socket M12 socket M12 socket
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> <li>4 for digital input signals</li> </ul>		No M12 socket M12 socket
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> </ul>		No M12 socket M12 socket M12 socket
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> <li>4 for digital input signals</li> </ul>		No M12 socket M12 socket M12 socket
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> <li>4 for digital input signals</li> </ul> Type of electrical connection		No M12 socket M12 socket M12 socket M12 socket
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> <li>Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> <li>4 for digital input signals</li> </ul> </li> <li>Type of electrical connection <ul> <li>at the manufacturer-specific device interface</li> </ul> </li> </ul>		No M12 socket M12 socket M12 socket M12 socket M12 socket optical interface
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> <li>4 for digital input signals</li> <li>4 for digital input signals</li> <li>5 for digital input signals</li> <li>6 for digital input signals</li> <li>6 at the manufacturer-specific device interface</li> <li>6 for main energy infeed</li> </ul>		No M12 socket M12 socket M12 socket M12 socket M12 socket M12 socket optical interface socket according to ISO23570
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> <li>4 for digital input signals</li> <li>4 for digital input signals</li> </ul> Type of electrical connection <ul> <li>at the manufacturer-specific device interface</li> <li>for main energy infeed</li> <li>for load-side outgoing feeder</li> </ul>		No M12 socket M12 socket M12 socket M12 socket M12 socket optical interface socket according to ISO23570 socket according to ISO23570
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> <li>4 for digital input signals</li> <li>4 for digital input signals</li> <li>5 for digital input signals</li> <li>6 for digital input signals</li> <li>7 type of electrical connection</li> <li>at the manufacturer-specific device interface</li> <li>for main energy infeed</li> <li>for load-side outgoing feeder</li> <li>for main energy transmission</li> </ul>		No M12 socket M12 socket M12 socket M12 socket M12 socket M12 socket Optical interface socket according to ISO23570 socket according to ISO23570 socket according to ISO23570
<ul> <li>digital inputs parameterizable</li> <li>digital outputs parameterizable</li> </ul> Type of electrical connection <ul> <li>1 for digital input signals</li> <li>2 for digital input signals</li> <li>3 for digital input signals</li> <li>4 for digital input signals</li> <li>4 for digital input signals</li> <li>5 for digital input signals</li> <li>6 for digital input signals</li> <li>7 type of electrical connection</li> <li>at the manufacturer-specific device interface</li> <li>for main energy infeed</li> <li>for load-side outgoing feeder</li> <li>for main energy transmission</li> <li>for supply voltage line-side</li> </ul>		No M12 socket M12 socket M12 socket M12 socket M12 socket M12 socket Optical interface socket according to ISO23570 socket according to ISO23570 via backplane bus

Safety related d Protection again	ata: st electrical shock		finger-safe		
Certificates/app	rovals				
General Pro	duct Approval			Declaration of	Test
				Conformity	Certificates
(m)			гпг		Type Test Certificates/Test
(ui	<b>U</b>		FHI	して	Report
ссс	CSA	UL		EG-Konf.	

### other

Environmental Confirmations

Confirmation

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5KS40-3AA0

#### Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5KS40-3AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5KS40-3AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RK1304-5KS40-3AA0&lang=en

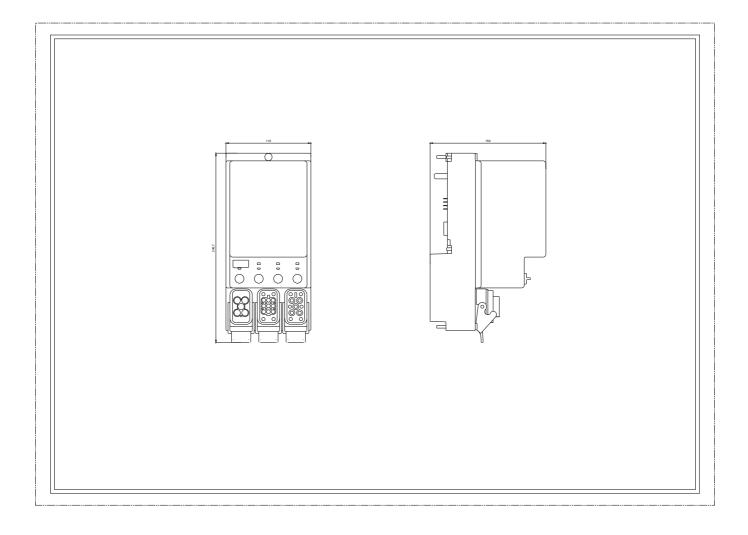

last modified:

08/11/2017