






AUXILIARY SWITCH 2NC FOR MCB 5SL, 5SY, 5SP, ON-OFF-SW.
5TL1, RCBO 5SU1, RCD 5SV



Model	
Product brand name	SENTRON
Product designation	Auxiliary current switch
Design of the product	Mountable
Design of the product / factory mounted	No
Control current	
Type of voltage / of control voltage	AC/DC
Product details	
Product extension	Auxiliary current switch
<ul style="list-style-type: none"> • can be mounted 	RCBO and miniature circuit breaker
Number	
Number of fault signal contacts	0
Number of NC contacts	2
Number of NO contacts	0
Number of CO contacts	0
Mechanical Design	
Number of width units	0.5

Net weight	67 g		
Equipment marking	SF		
• acc. to DIN EN 81346-2			
General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
 CCC	 UL	 VDE	 EG-Konf.
		Miscellaneous	 LRS

other

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3012>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3012>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3012

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

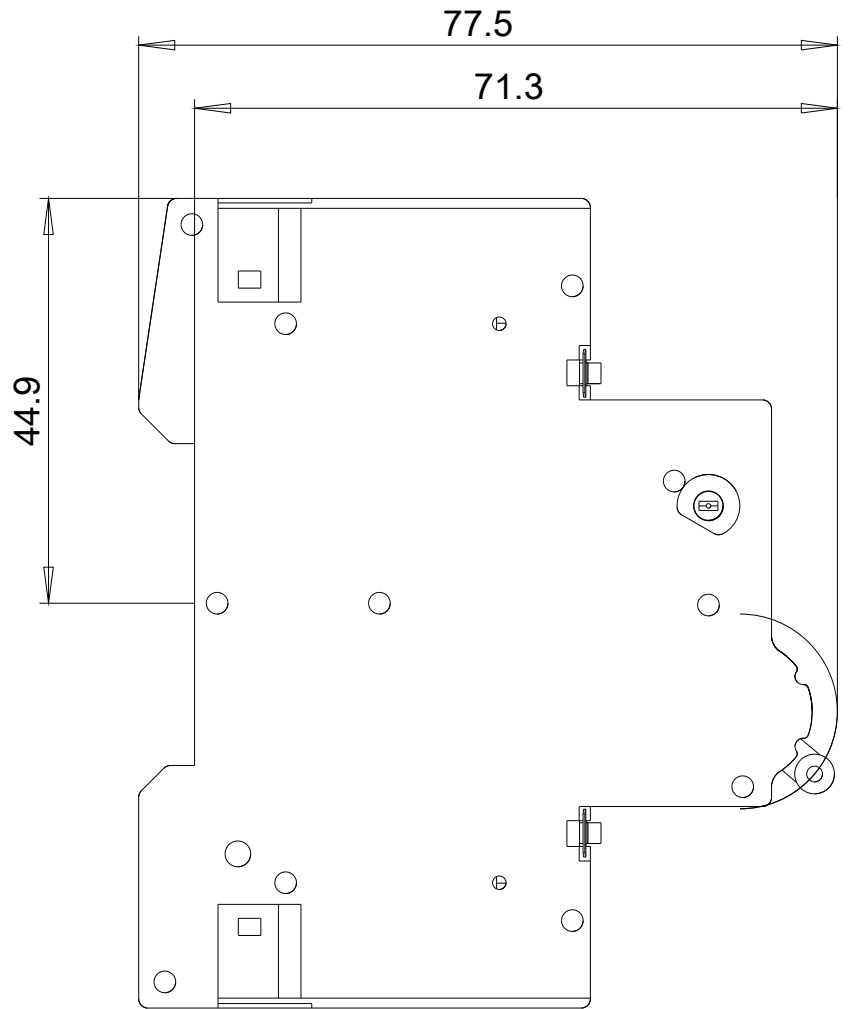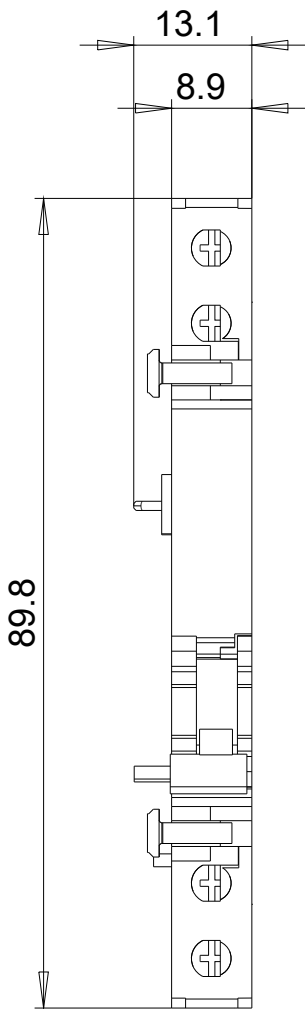

11

21

12

22

