


OPERATOR PANEL WITH DISPLAY; FOR SIMOCODE PRO V;
 INSTALLED IN CONTROL CABINET DOOR OR FRONT PLATE;
 CAN BE PLUGGED ONTO BASIC UNIT 2 OR EXPANSION
 MODULE; 7 LEDS FOR STATUS DISPLAY AND 4 USER-
 ASSIGNABLE KEYS FOR MANUAL CONTROL

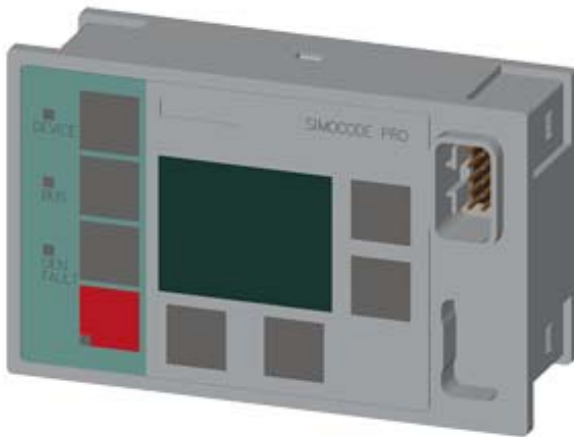

product brandname	SIRIUS
Product designation	operating module with display

General technical data

Insulation voltage	
• rated value	300 V
Surge voltage resistance rated value	4 000 V
Protection class IP	
• on the front	IP54
Vibration resistance	1-6 Hz / 15 mm; 6-500 Hz / 2 g
Certificate of suitability	CE / UL / CSA / CCC / C-Tick (RCM) / GOST / NOM / ABS / DNV / GL / LRS / RoHS
Equipment marking	
• acc. to DIN EN 61346-2	A
• acc. to DIN EN 81346-2	A

Electromagnetic compatibility

EMC emitted interference	
• acc. to IEC 60947-1	class A
Conducted interference	

- due to burst acc. to IEC 61000-4-4 1 kV
- due to conductor-earth surge acc. to IEC 61000-4-5 2 kV
- due to conductor-conductor surge acc. to IEC 61000-4-5 1 kV

Field-bound parasitic coupling acc. to IEC 61000-4-3 10 V/m






Installation/ mounting/ dimensions





Mounting position	any
Mounting type	front mounting
Height	60 mm
Width	96 mm
Depth	44 mm


Ambient conditions

Ambient temperature	
• during operation	0 ... 60 °C
• during storage	-20 ... +70 °C
• during transport	-20 ... +70 °C

Certificates/approvals

General Product Approval	EMC	Declaration of Conformity	Test Certificates
 CSA  UL  EAC  C-Tick  EG-Konf.			Type Test Certificates/Test Report

Test Certificates	Shipping Approval	other
Special Test Certificate	 ABS  DNV  GL  RMRS	Confirmation

other
 Profibus PROFI-safe-Certification PROFINET-Certification

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7210-1AA00-0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7210-1AA00-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3UF7210-1AA00-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7210-1AA00-0&lang=en

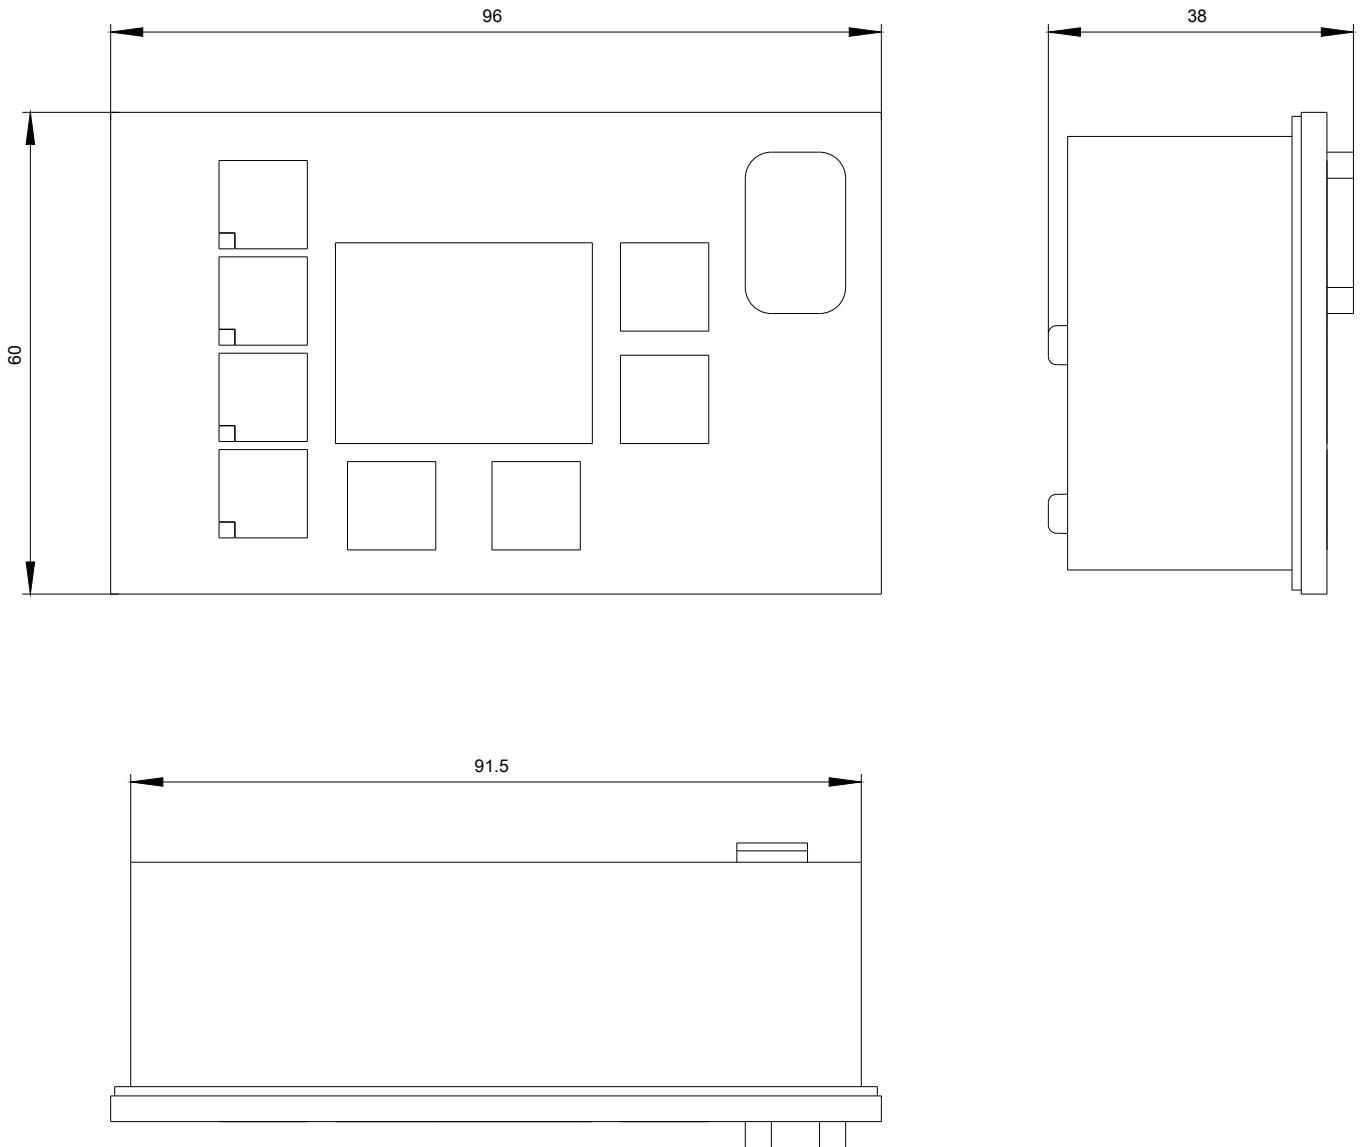

-K

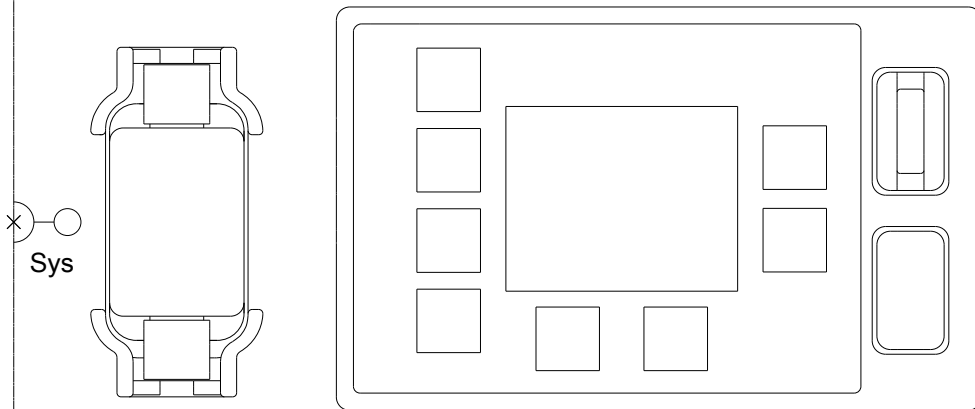

SIMOCODE PRO

last modified:

07/03/2017