

*** SPARE PART*** SIMATIC DP, EXPANSION MODULE EM 142, ET 200X, IP66/67, 4DO 24V DC/2A WITH DIAGNOSIS BY CHANNEL FOR ALL BASIC MODULES

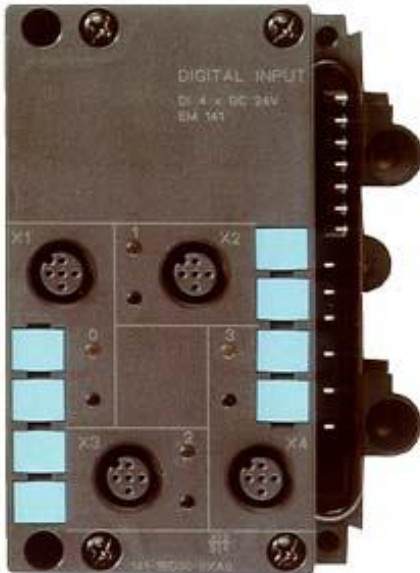


Figure similar

Input current	
from load voltage 2L+ (without load), max.	60 mA
from backplane bus 5 V DC, max.	40 mA
Power loss	
Power loss, typ.	2.5 W
Digital outputs	
Number of digital outputs	4
Short-circuit protection	Yes; Electronic
• Response threshold, typ.	3.5 A
Switching capacity of the outputs	
• on lamp load, max.	10 W
Output current	
• for signal "1" rated value	2 A; at 24 V DC
• for signal "0" residual current, max.	0.5 mA
Switching frequency	
• with resistive load, max.	100 Hz

<ul style="list-style-type: none"> • with inductive load (acc. to IEC 60947-5-1, DC13), max. 	0.5 Hz
<ul style="list-style-type: none"> • on lamp load, max. 	1 Hz
Total current of the outputs (per module)	
all mounting positions	
— up to 20 °C, max.	6 A
— up to 55 °C, max.	4 A
Cable length	
<ul style="list-style-type: none"> • unshielded, max. 	30 m
Interrupts/diagnostics/status information	
Diagnostic functions	Yes; Parameterizable
Diagnostic messages	
<ul style="list-style-type: none"> • Wire-break 	Yes; channel by channel
<ul style="list-style-type: none"> • Short-circuit 	Yes; channel by channel
Potential separation	
between backplane bus and all other circuit components	Yes
Potential separation digital outputs	
<ul style="list-style-type: none"> • between the channels 	No
Dimensions	
Width	87 mm; Width module 60 mm
Height	110 mm
Depth	55 mm
Weights	
Weight, approx.	250 g
last modified:	03/11/2017