

EXTERNAL DISPLAY AND OPERATING MODULE F. SIRIUS SOFT STARTERS 3RW44 CONNECTING CABLE E.G. 2.5M (3UF7933-0BA00-0) NOT INCL. IN SCOPE OF SUPPLY REQUIRED SOFTWARE VERSION 3RW44 >= *E05*. IMPLEMENTED FOR 3RW44 STARTERS FROM DELIVERY DATE 05.2006 ONWARDS








Figure similar

General technical data:

product brandname		SIRIUS
Product designation		External display and control module
Product type designation of soft starter		3RW44..
Protection class IP		IP 54
Height	mm	600
Width	mm	960

Certificates/ approvals:

General Product Approval			EMC	Declaration of Conformity	Test Certificates
 CSA	 UL		 C-Tick	 EG-Konf.	Special Test Certificate

Shipping Approval					other
 ABS	 BUREAU VERITAS	 GL	 LRS	 PRS	Environmental Confirmations

other
Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4900-0AC00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4900-0AC00>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4900-0AC00&lang=en

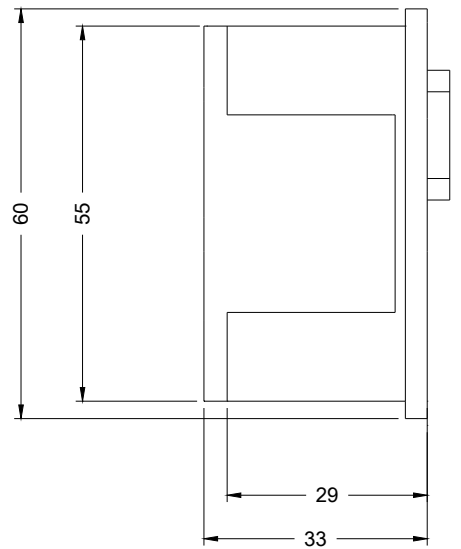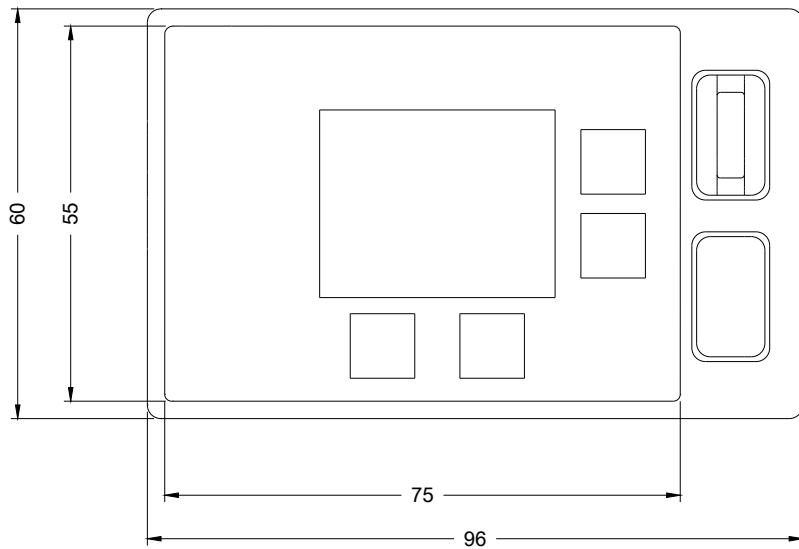

-K1

SIRIUS 3RW

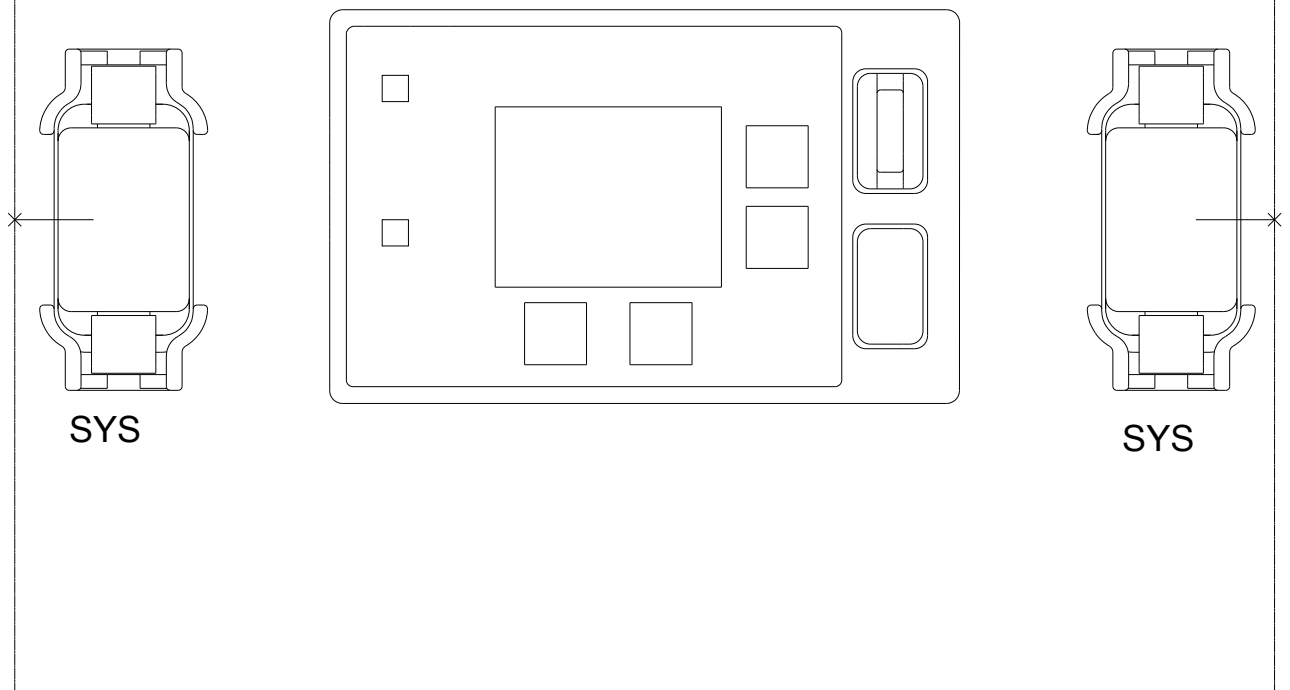

last modified:

06/12/2017