

AS-INTERFACE FUNCTION MODULE LOGO!  
STANDARD SLAVE IP20 4DI/4DO COMPATIBLE WITH  
SERIES 0BA6 AND 0BA7



General technical data:

Design of the product		AS-Interface connection for LOGO!
Type		4 inputs (virtual) / 4 outputs (virtual)
Design of the slave type		standard slave
Supply voltage DC	V	24
Status display display of AS-Interface/diagnostics		green/red dual LED

Inputs:

Number of digital inputs		4
--------------------------	--	---

Outputs:

Number of digital outputs		4
---------------------------	--	---

Ambient conditions:

Ambient temperature during operation	°C	0 ... 55
Protection class IP		IP20

Mechanical data:

Width	mm	36
Height	mm	90
Depth	mm	58

Mounting type

on standard rail

Certificates/ approvals:

General Product Approval



CSA



UL



EG-Konf.

Test  
Certificates

[Special Test  
Certificate](#)

Shipping  
Approval



ABS

Shipping Approval

other



LRS



PRS



RINA



RMRS



Asi

[Environmental  
Confirmations](#)

other

[Confirmation](#)

[Miscellaneous](#)

Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK1400-0CE10-0AA2>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1400-0CE10-0AA2>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RK1400-0CE10-0AA2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1400-0CE10-0AA2&lang=en)

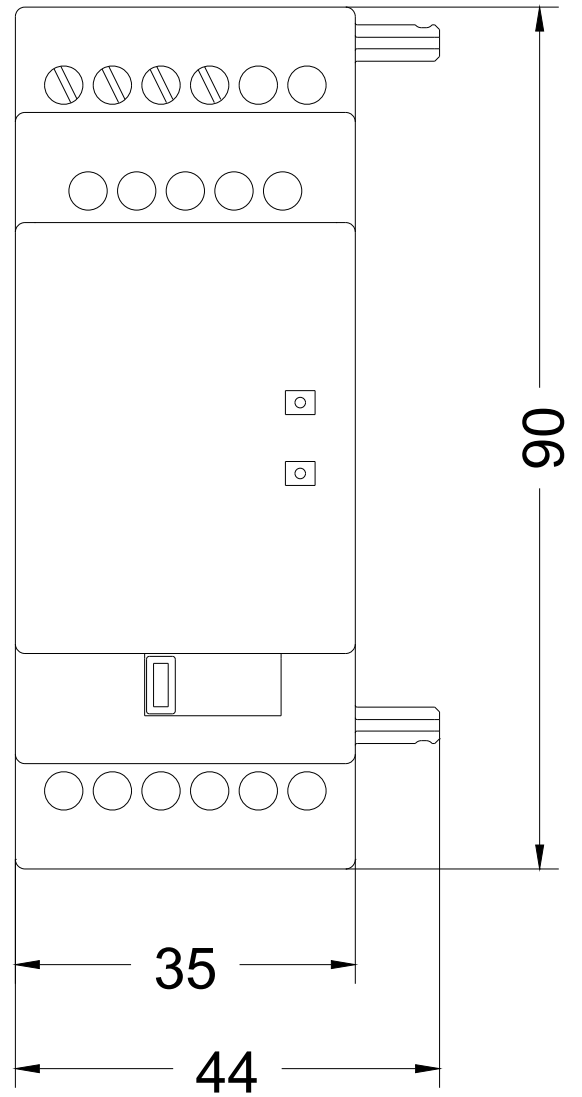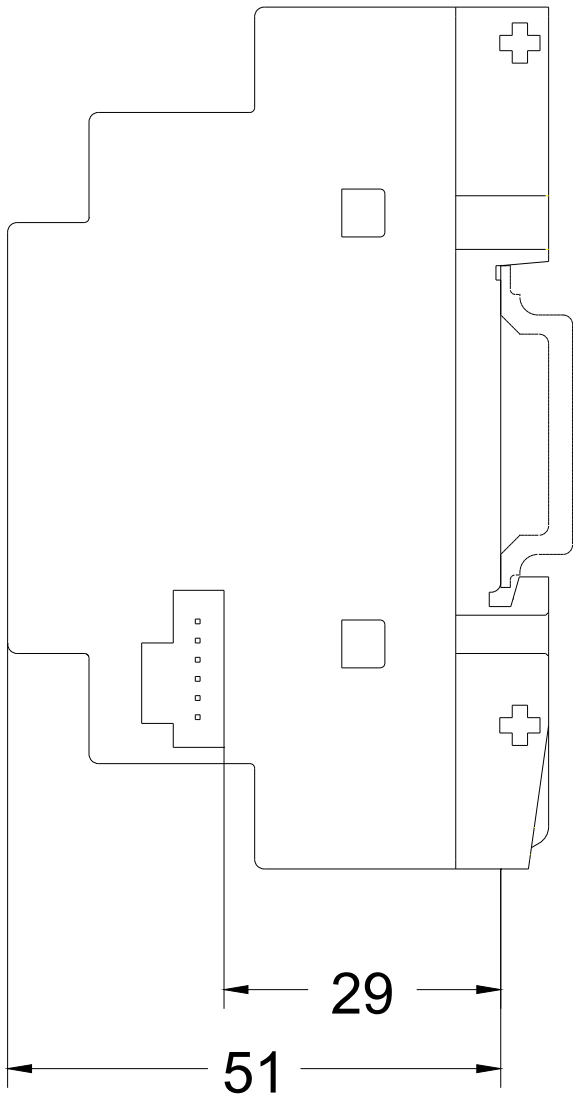

last modified:

07/17/2017