

4PP065.0351-X74

1 Order data

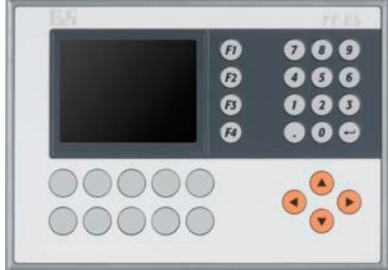
Model number	Short description	Figure
	Power Panel 65	
4PP065.0351-X74	Power Panel PP65, 3.5" QVGA color TFT display with touch screen (resistive), 30 function keys, 128 MB DRAM, 232 kB SRAM, CompactFlash slot, 1x ETH 10/100, 1x X2X Link, 2x USB, IP65 protection (front), order application memory separately Order 0TB103 and 0TB704 terminal blocks separately	
	Required accessories	
	Accessories	
0TB103.9	Connector 24 VDC - 3-pin female - Screw clamp terminal block 3.31 mm ²	
0TB103.91	Connector 24 VDC - 3-pin female - Cage clamp terminal block 3.31 mm ²	
	CompactFlash cards	
0CFCRD.0128E.01	CompactFlash 128 MB WD extended temp.	
0CFCRD.0512E.01	CompactFlash 512 MB WD extended temp.	
5CFCRD.016G-06	CompactFlash 16 GB B&R (SLC)	
5CFCRD.0512-06	CompactFlash 512 MB B&R (SLC)	
5CFCRD.1024-06	CompactFlash 1 GB B&R (SLC)	
5CFCRD.2048-06	CompactFlash 2 GB B&R (SLC)	
5CFCRD.4096-06	CompactFlash 4 GB B&R (SLC)	
5CFCRD.8192-06	CompactFlash 8 GB B&R (SLC)	
	Terminal blocks	
0TB704.9	Accessory terminal block, 4-pin, screw clamps 2.5 mm ²	
0TB704.91	Accessory terminal block, 4-pin, cage clamps 2.5 mm ²	
	Optional accessories	
	Batteries	
0AC201.91	Lithium batteries 4 pcs., 3 V / 950 mAh button cell	
4A0006.00-000	Lithium battery, 3 V / 950 mAh, button cell	
	Interface modules	
4PP065.IF10-1	PP65 interface module, 1 RS232 interface	
4PP065.IF23-1	PP65 interface module, 1 RS232 interface, 1 RS485/RS422 interface, RS422 electrically isolated, RS485 electrically isolated and network-capable, RS232/RS485/RS422 in one connector, 1 CAN interface electrically isolated and network-capable, order 0TB704 terminal block separately	
4PP065.IF24-1	PP65 interface module, 1 PROFIBUS DP slave interface electrically isolated and network-capable, 1 RS232 interface, 1 RS422/RS485 interface, RS422/RS485: electrically isolated and network-capable, RS232/RS422/RS485 in one connector	
4PP065.IF33-1	PP65 interface module, 2 CAN interfaces electrically isolated and network-capable, order 0TB704 terminal block separately	
	Legend strips	
4A0069.00-000	5 piece of DIN A4 legend strips, 14 areas for all in all 35 PP65 3.5" devices, Download the CorelDraw file from the web site.	
	USB accessories	
5MMUSB.2048-01	USB 2.0 flash drive 2048 MB B&R	

Table 1: 4PP065.0351-X74 - Order data

2 Technical data

Model number	4PP065.0351-X74
General information	
B&R ID code	0xA965
LED status indicators	
Quantity	4
CF (CompactFlash)	Orange
Status	Red/Green
X2X	Orange
User	Green

Table 2: 4PP065.0351-X74 - Technical data

Model number	4PP065.0351-X74
Battery	
Type	Renata 950 mAh
Service life	4 years ¹⁾
Removable	Yes, accessible from the outside
Design	Lithium ion
Power button	No
Reset button	No
Backup capacitor	
Buffer time	10 min
Certification	
CE	Yes
UL	cULus E115267 Industrial Control Equipment
Controller	
Boot loader, operating system	
PP65 supported beginning with version	Automation Runtime, C2.96
Processor	
Type	Geode LX800, 32-bit x86
Clock frequency	500 MHz
L1 cache	128 kB (64 kB I-cache / 64 kB D-cache)
L2 cache	128 kB
Expanded command set	MMX technology, 3D Now
Floating point unit (FPU)	Yes
Flash	4 MB (for firmware)
Cooling	Passive via heat sink
Mode/Node switches	2, 16 positions each
Remanent variables	32 kB
Watchdog	MTCX ²⁾
Real-time clock	
Precision	At 25°C: Typ. 30 ppm (2.5 seconds) per day ³⁾
Battery-backed	Yes
Power failure logic	
Controller	MTCX ²⁾
Buffer time	10 ms
Graphics	
Controller	Geode LX800
Memory	8 MB shared memory (allocated in RAM)
Standard memory	
RAM	128 MB DDR SDRAM
User RAM	232 kB SRAM
PP65 Compact IF slot	1
Interfaces	
CompactFlash slot 1	
Quantity	1
Type	Type I
Design	Primary IDE device
USB	
Quantity	2
Type	USB 2.0
Design	Type A
Transfer rate	Low speed (1.5 Mbit/s), full speed (12 Mbit/s), high speed (480 Mbit/s)
Current-carrying capacity	Max. 500 mA per connection
Ethernet	
Quantity	1
Controller	Intel 82551ER
Design	Shielded RJ45 port (10/100 Base-T)
Transfer rate	10/100 Mbit/s
Max. baud rate	100 Mbit/s
Cables	S/STP (Category 5)
LED status indicators	Link/Activity
X2X	
Type	X2X Link master
Quantity	1
Design	4-pin male multipoint connector
Internal bus supply	No
Number of stations	Max. 253
Distance between 2 stations	Max. 100 m
Network topology	Line
Terminating resistor	Internal
Display	
Type	TFT color
Display size	3.5" (89 mm)
Colors	262,144

Table 2: 4PP065.0351-X74 - Technical data

Model number	4PP065.0351-X74
Resolution	QVGA, 320 x 240 pixels
Contrast	700:1
Viewing angles	
Horizontal	Direction R / Direction L = 80°
Vertical	Direction U / Direction D = 80°
Backlight	
Brightness	400 cd/m ²
Half-brightness time	50,000 h
Touch screen	
Technology	Analog, resistive
Controller	B&R, 12-bit
Transmittance	70% ±10%
Screen rotation	Yes (see chapter "Installation", section "Screen rotation")
Keys	
Design	Membrane keypad with metallic snap-action disks
Total keys	30 membrane keys
Function keys	14 (with slide-in labels)
System keys	16 (number block, cursor block, control keys)
Service life	> 10 ⁶ actuations with 1 ±0.3 to 3 ±0.3 N operating force
Electrical characteristics	
Nominal voltage	24 VDC ±25%
Nominal current	0.45 A
Inrush current	Max. 2.8 A
Power consumption	Typ. 10 W
Electrical isolation	No
Operating conditions	
Installation at elevations above sea level	
Maximum	3000 m
EN 60529 protection	Back: IP20 (only with an inserted CompactFlash card) Front: IP65 / NEMA 250 type 4X, dust and sprayed water protection
Environmental conditions	
Temperature	
Operation	0 to 50°C
Storage	-20 to 70°C
Transport	-20 to 70°C
Relative humidity	
Operation	10 to 90%, non-condensing
Storage	T ≤ 40°C: 5 to 90%, non-condensing T > 40°C: <90%, non-condensing
Vibration	
Operation (continuous)	2 to 9 Hz: 1.75 mm amplitude / 9 to 200 Hz: 0.5 g
Operation (occasional)	2 to 9 Hz: 3.5 mm amplitude / 9 to 200 Hz: 1 g
Storage	2 to 8 Hz: 7.5 mm amplitude / 8 to 200 Hz: 2 g / 200 to 500 Hz: 4 g
Transport	2 to 8 Hz: 7.5 mm amplitude / 8 to 200 Hz: 2 g / 200 to 500 Hz: 4 g
Shock	
Operation	15 g, 11 ms
Storage	30 g, 15 ms
Transport	30 g, 15 ms
Mechanical characteristics	
Housing	
Material	Polyester
Front	Multi-layered panel overlay with insertion slots for key labels
Dimensions	
Width	203 mm
Height	145 mm
Depth	56.5 mm
Weight ⁴⁾	0.5 kg

Table 2: 4PP065.0351-X74 - Technical data

- 1) Typical service life (at 50% buffer operation: 25°C when device off, 50°C when device on).
Maximum service life in 24h operation (no buffer): 6 years at 25°C, 5 years at 50°C.
Maximum service life when device switched off: 2 years at 25°C, 1 year at 50°C.
- 2) Maintenance Controller Extended.
- 3) At max. specified ambient temperature: Typ. 50 ppm (4 s); worst case 100 ppm (8 s)
- 4) Weight including fasteners and battery (46.5 g) but without an interface module.


3 Supported interface modules

Support for interface modules is provided starting with the following Automation Runtime versions:

	Interface modules			
	4PP065.IF10-1	4PP065.IF23-1	4PP065.IF24-1	4PP065.IF33-1
Automation Runtime version	C2.96	C2.96	A3.07	C2.96

4 Diagnostic LEDs

There are four diagnostic LEDs on the back of the PP65.

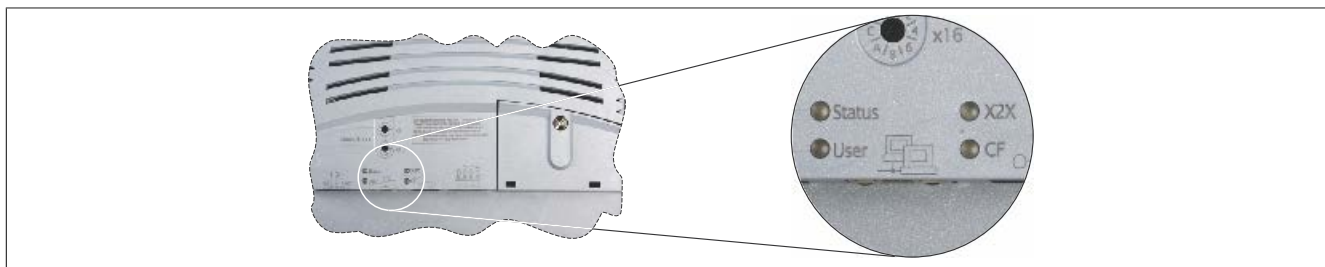

Information:

The behavior of the Status LED has changed starting with AR J2.96, E3.01 and B3.06.

4.1 Diagnostic LEDs up to AR I2.96, D3.01 and A3.06

LED	Color	Status	Description
Status	Red	On	Error/Reset
	Orange	On	Boot or Ready mode
User	Green	On/Off	LED operable by the user (with the AsHW library)
X2X	Orange	On	Module sending data via the X2X Link interface
CF	Orange	On	CompactFlash card being accessed

4.2 Diagnostic LEDs starting with AR J2.96, E3.01 and B3.06

LED	Color	Status	Description
Status	see following table "Status LED blink codes"		
User	Green	On/Off	LED operable by the user (with the AsHW library)
X2X	Orange	On	Module sending data via the X2X Link interface
CF	Orange	On	CompactFlash card being accessed


Status LED blink codes

Blink codes (200 ms pattern)	Function
Red	Error/Reset
Green	No errors, normal operation
Orange	Battery not installed or battery capacity too low
Orange	CompactFlash media not found
Reserved	Reserved for future blink codes

Because blink codes can only signal one error at a time, errors with higher priority take precedence. Fatal errors have a higher priority than less significant errors (e.g. low battery capacity).


4.3 ACT / LNK LEDs for the RJ45 interface

There are two additional LEDs for the Ethernet interface.

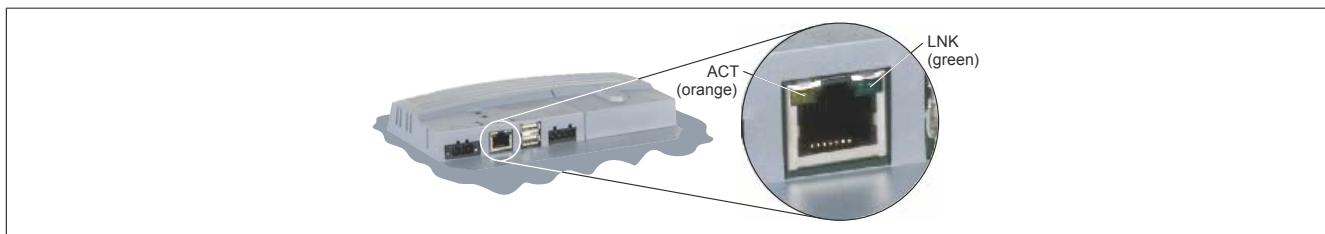

LED	Color	Status	Description
ACT	Orange	On	No Ethernet activity on the bus.
		Blinking	Ethernet activity on the bus.
LNK	Green	On	Link established to the remote station

5 Connection elements

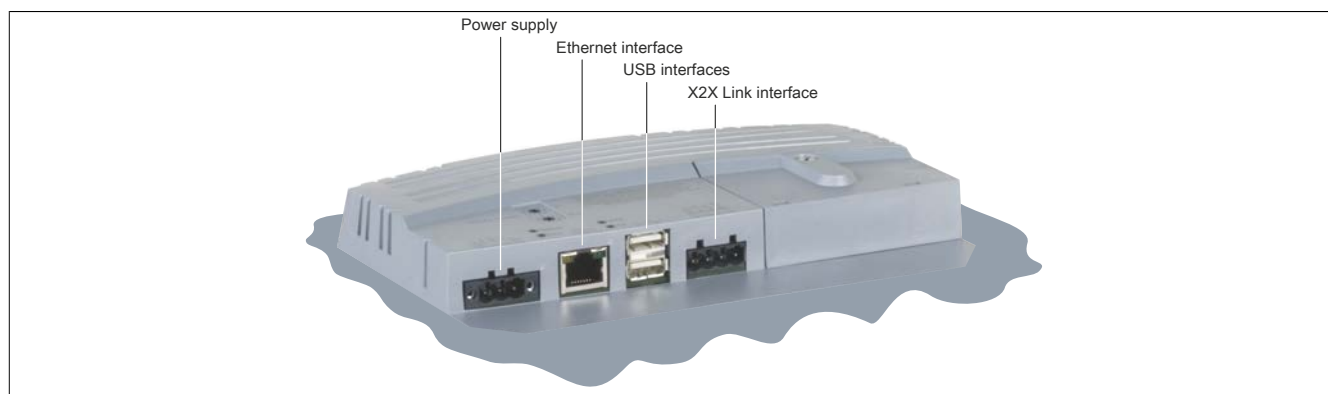


5.1 X2X Link interface

Interface	Pinout		
User interface X2X Link 	Terminal	X2X Link	
	1	X2X	X2X data
	2	X2X _L	X2X ground
	3	X2X _I	X2X data inverted
	4	SHLD	Shield
Required accessories			
0TB704.9	Terminal block accessory, 4-pin, screw clamps, 2.5 mm ²		
0TB704.91	Terminal block accessory, 4-pin, cage clamps, 2.5 mm ²		

5.2 USB interface

This Power Panel 65 features a USB 2.0 (Universal Serial Bus) host controller with two USB ports that are accessible externally for the user.

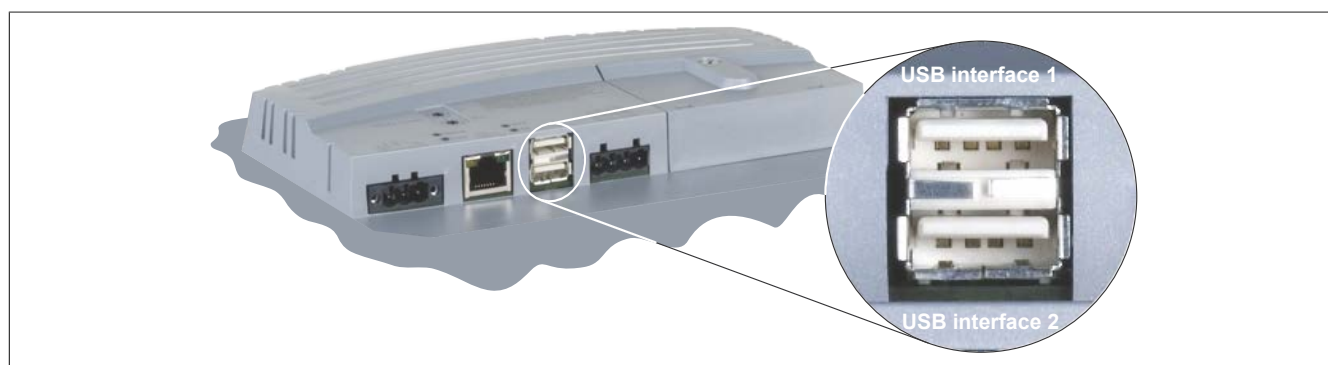

USB interface	
Transfer rate ¹⁾	Low speed (1.5 Mbit/s), full speed (12 Mbit/s), high speed (480 Mbit/s)
Power supply	Max. 0.5 A per port ²⁾

1) The actual value depends on the operating system or driver being used.

2) Each USB interface is protected by a maintenance-free "USB current-limiting circuit breaker" (max. 0.5 A).


Warning!

Peripheral USB devices can be connected to the USB interfaces on this device. Due to the vast number of USB devices available on the market, B&R cannot guarantee their performance. All USB devices provided by B&R are guaranteed to function properly.

Important!


Because of general PC specifications this interface should be handled with extreme care with regard to EMC, location of cables etc.

5.3 Ethernet interface

Interface	Pinout		
	Terminal	Ethernet	
<div>Ethernet interface</div> <div></div> <div>Female RJ45 twisted pair connector (10BaseT/100BaseT)</div>	1	RXD	Receive signal
	2	RXD\	Receive signal inverted
	3	TXD	Transmit signal
	4	Termination	Termination
	5	Termination	Termination
	6	TXD\	Transmit signal inverted
	7	Termination	Termination
	8	Termination	Termination

5.4 Power supply


The pinout is listed in the following table and printed on the back of the Power Panel. The Power Panel has reverse polarity protection that prevents the supply voltage from being connected incorrectly and damaging the device. Overload protection must be provided by an external fuse (5 A, fast-acting).

Power supply	Pinout	
	Terminal	Assignment
<div></div> <div>3-pin male multipoint connector</div>	+	24 VDC
	⏏	Functional ground
	-	GND
	Required accessories	
	0TB103.9	Connector, 24 VDC, 3-pin female, 3.31 mm² screw clamps, protected against vibration by the screw flange
	0TB103.91	Connector, 24 VDC, 3-pin female, 3.31 mm² cage clamp terminal block, protected against vibration by the screw flange

Important!


The functional ground must be connected to ground (e.g. control cabinet) using the shortest possible path. Using the largest possible conductor cross section on the supply connector is recommended.

6 Key assignments

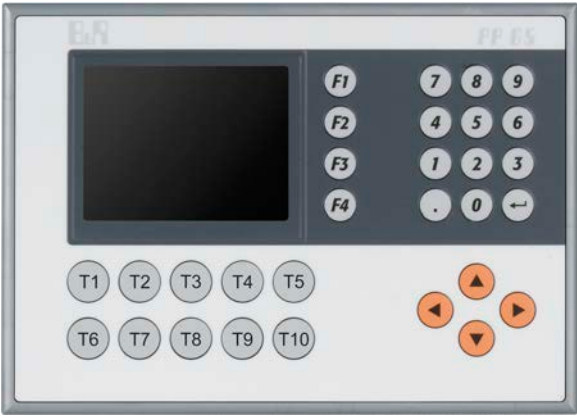

Key	Bit	Key	Bit	Key	Bit	Key	Bit	Key	Bit
F1	63	3	37	9	39	T3	8	T9	2
F2	62	4	54	0	44	T4	0	T10	58
F3	61	5	46	.	52	T5	56	◀	49
F4	60	6	38	↵	36	T6	26	▲	40
1	53	7	55	T1	24	T7	18	▶	33
2	45	8	47	T2	16	T8	10	▼	42


7 Operating mode and node number switches

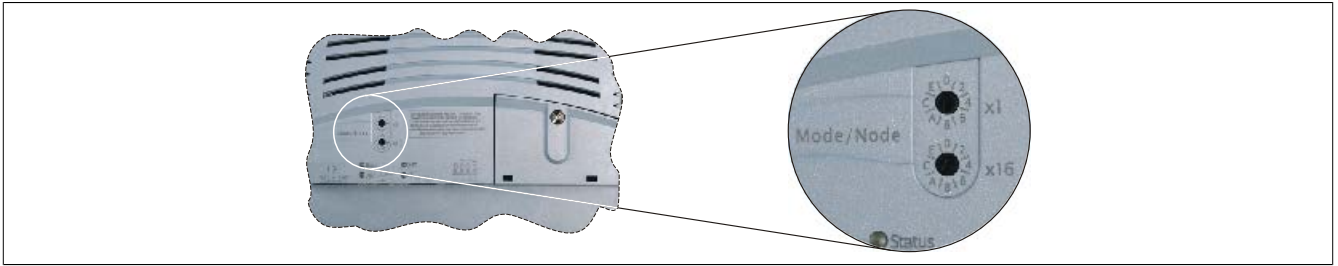

The Power Panel 65 device is equipped with 2 hex switches that can be used as operating mode or node number switches. Switch positions 0x01 to 0xFE are used to set the INA station number of the Ethernet interface.

Switch position	Description
0x00	Reserved
0x01 to 0xFE	INA node number of the Ethernet interface
0xFF	Diagnostic mode: Boots the CPU in diagnostic mode. Does not initialize program sections in User RAM and User FlashPROM. After diagnostic mode, the CPU always boots with a warm restart.

8 Dimensions

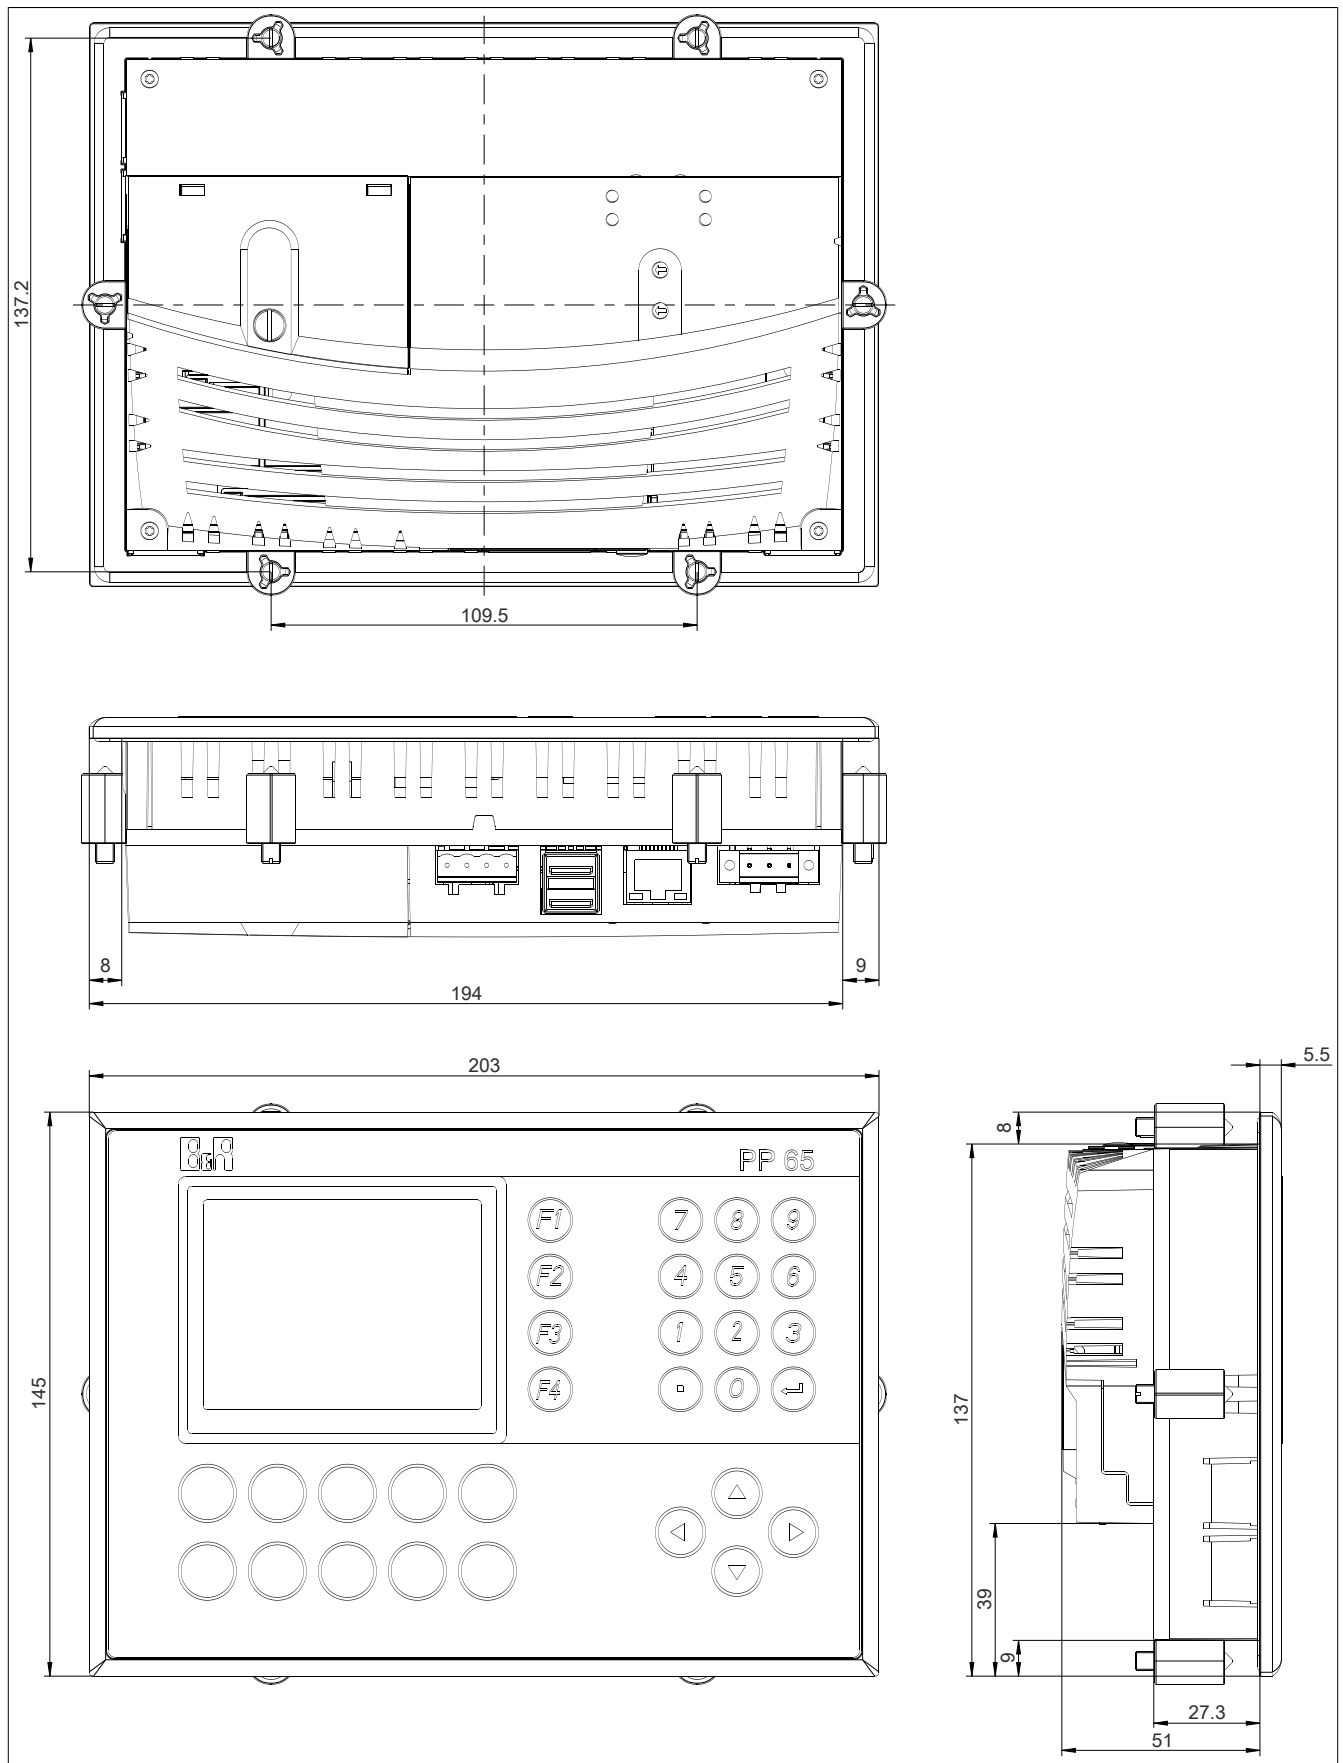

Installation cutout: $188 \pm 0.5 \text{ mm} \times 130 \pm 0.5 \text{ mm}$