

# SIEMENS

## Product data sheet

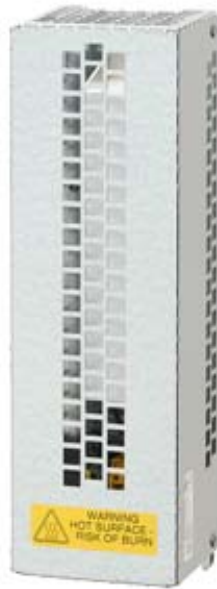
**6SL3201-0BE21-0AA0**


Fig. similar

SINAMICS BRAKING RESISTOR R=140OHM  
 P\_RATED=200W P\_MAX=4000W/12S/5% DUTY  
 STANDALONE

Electrical resistance / of the braking resistor	140 Ω
Active power drawn / rated value	0.2 kW
• maximum	4 kW
Version, electrical connection / for power cable	Terminal block
Connectable conductor cross-section / for power cable	2.5 mm <sup>2</sup>
Design of the temperature switch	Normally closed contact
Input voltage / of the temperature switch / for AC / maximum	250 V
Input current / of the temperature switch / for AC / maximum	2.5 A
Connectable conductor cross-section / on the temperature switch / maximum	2.5 mm <sup>2</sup>
Design of electrical connection / of the protective conductor connection	Yes
Design of the protective conductor connection / to housing	M4 screw

Protection class IP	IP20
Width	105 mm
Height	345 mm
Depth	100 mm
Net weight	1.8 kg

**Further information**

[Information and download center for Industry Automation and Drives](#)

[Technical documentation \(Motion Control\)](#)

[Industry Mall \(online ordering system\)](#)

[Service & Support \(FAQs, manuals, operating instructions, certificates, characteristics, ...\)](#)

**last change:**

Mar 1, 2013