

# SIEMENS

## Product data sheet

## 6SL3000-0CE33-3AA0

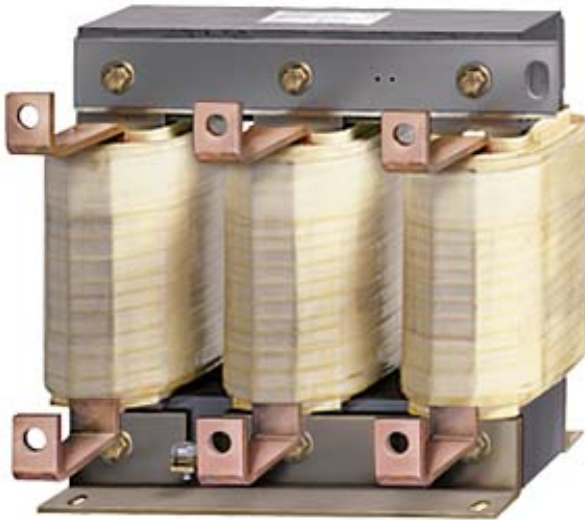


Fig. similar

SINAMICS/MICROMASTER PX LINE REACTOR  
 INPUT: 3AC 380-480 V,  
 50/60 HZ 331 A

Output current / rated value	331 A
Effective power loss	
• at 50 Hz	230 W
• at 60 Hz	270 W
Design of electrical connection / for PE conductor	M6 screw
Protection class IP	IP00
Width	270 mm
Height	248 mm
Depth	200 mm
Net weight	27.8 kg

### Further information

[Information and download center for Industry Automation and Drives](#)

[Technical documentation \(Motion Control\)](#)

[Industry Mall \(online ordering system\)](#)

[Service & Support \(FAQs, manuals, operating instructions, certificates, ...\)](#)

**last change:**

Mar 1, 2013