



ET 200PRO DSE HF DIRECT STARTER HIGH FEATURE; MECH. SWITCHING; ELECTRO. UE PROTECTION; 3PH 400 V/5.5KW; 1.50A...12.00 WITHOUT BRAKE CONTACT 4DI 24 V DC; HAN Q4/2 - HAN Q8/0

General technical data:

product brandname		SIRIUS
Product designation		ET 200pro motor starters
Design of the product		direct starter
Product function		
• Bus communication		Yes
• direct start		Yes
• reverse starting		No
• on-site operation		Yes
• Short circuit protection		Yes
Design of the switching contact		electromechanical
Product component Motor brake output		No
Trip class		CLASS 10
Type of assignment		1
Product feature		
• brake control with 400 V AC		No
• brake control with 230 V AC		No
• brake control with 24 V DC		No
• brake control with 180 V DC		No

• brake control with 500 V DC		No
Surge voltage resistance rated value	kV	6
maximum permissible voltage for safe isolation between main and auxiliary circuit	V	400
Equipment marking acc. to DIN EN 61346-2		Q
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		A
Mounting type		screw fixing
Depth	mm	150
Height	mm	230
Width	mm	110

Main circuit:

Operating range relative to the operating voltage at AC at 50 Hz	V	200 ... 440
Operating voltage at AC at 60 Hz acc. to CSA and UL rated value	V	600
Adjustable pick-up value current of the current-dependent overload release	A	1.5 ... 12
Operating current at AC-3 at 400 V rated value	A	12
Operating power at AC-3 at 400 V rated value	W	5 500
Operating power for three-phase motors at 400 V at 50 Hz minimum	W	700
Operating power for three-phase motors at 400 V at 50 Hz maximum	W	5 500
Maximum short-circuit current breaking capacity (I _{cu}) at 400 V rated value	A	100 000
Design of short-circuit protection		fuse
Number of poles for main current circuit		3
Type of the motor protection		solid-state
Mechanical service life (switching cycles) of the main contacts typical		30 000 000

Control circuit/ Control:

Type of voltage of the control supply voltage		DC
Control supply voltage 1 at DC Final rated value	V	24
Control supply voltage 1 at DC rated value		
• minimum permissible	V	20.4
• maximum permissible	V	28.8

Supply voltage:

Type of voltage of the supply voltage		DC
Supply voltage 1 at DC Final rated value	V	24
Supply voltage 1 at DC rated value		
• minimum permissible	V	20.4
• maximum permissible	V	28.8

Ambient conditions:		
Protection class IP		IP65
Ambient temperature		
• during operation	°C	-25 ... +55
• during storage	°C	-40 ... +70
• during transport	°C	-40 ... +70
Relative humidity during operation	%	5 ... 95
Vibration resistance		2g
Shock resistance		15g / 11 ms
Degree of pollution		3
Installation altitude at height above sea level maximum	m	3 500
Mounting position		vertical, horizontal

Communication/ Protocol:		
Protocol is supported		
• PROFIBUS DP protocol		Yes
• PROFINET protocol		Yes
• AS-interface protocol		No
Design of the interface PROFINET protocol		Yes
Type of electrical connection of the communication interface		via backplane bus

Connections/ Terminals:		
Number of digital inputs		4
Number of sockets		
• for digital input signals		4
• for digital output signals		0
Product function		
• digital inputs parameterizable		Yes
• digital outputs parameterizable		No
Type of electrical connection		
• 1 for digital input signals		M12 socket
• 2 for digital input signals		M12 socket
• 3 for digital input signals		M12 socket
• 4 for digital input signals		M12 socket
Type of electrical connection		
• at the manufacturer-specific device interface		optical interface
• for main energy infeed		socket according to ISO23570
• for load-side outgoing feeder		socket according to ISO23570
• for main energy transmission		socket according to ISO23570
• for supply voltage line-side		via backplane bus
• for supply voltage transmission		via backplane bus
• for main current circuit		tab terminals

Safety related data:

Protection against electrical shock

finger-safe

Certificates/approvals

General Product Approval			Declaration of Conformity	Test Certificates	
 CCC	 CSA	 UL	 EAC	 EG-Konf.	Type Test Certificates/Test Report

other

[Environmental Confirmations](#)

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5LS40-2AA0>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1304-5LS40-2AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5LS40-2AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-5LS40-2AA0&lang=en

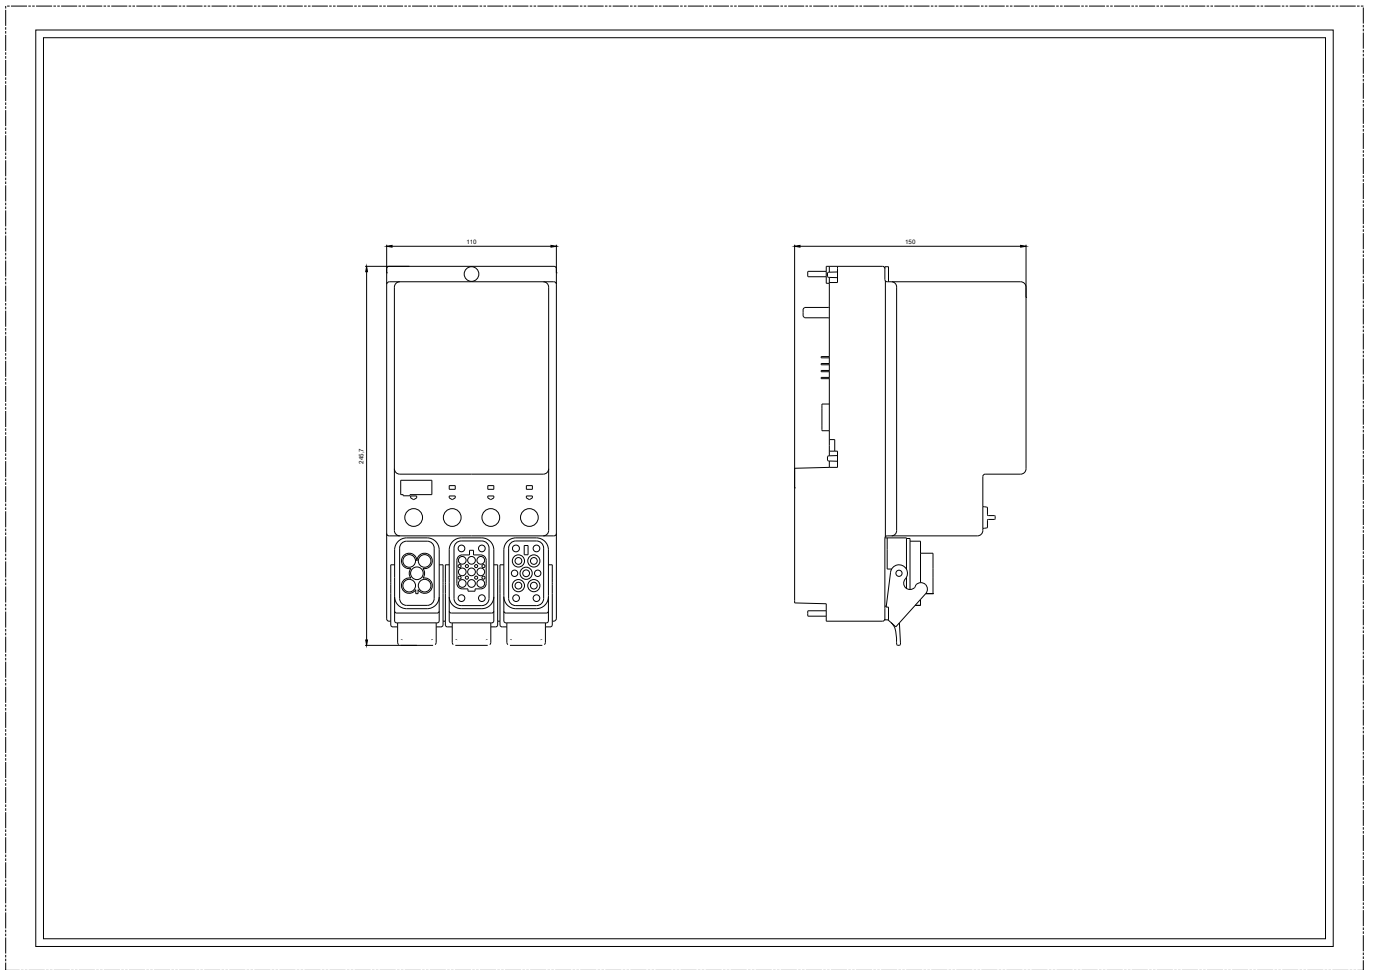

last modified:

08/11/2017