

\*\*\* SPARE PART\*\*\* SIMATIC DP, ELECTRON. MODULE F.  
 ET200S, 4 F-DO PROFISAFE, DC 24V/2A, 30 MM WIDTH UP TO  
 CATEGORY 4 (EN954-1)/ SIL3 (IEC61508)/PLE (ISO13849), ALSO  
 USEABLE IN PROFINET- NETWORKS WITH IM151-3 HF

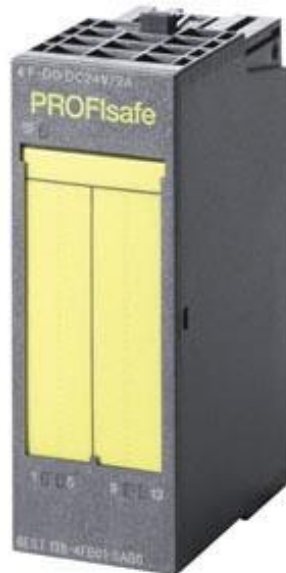


Figure similar

Supply voltage	
Load voltage L+	
• Rated value (DC)	24 V
• Reverse polarity protection	No
Input current	
From load voltage L+ (no load), typ.	100 mA
from backplane bus 3.3 V DC, max.	28 mA
Power loss	
Power loss, typ.	3.5 W
Digital outputs	
Number of digital outputs	4
Short-circuit protection	Yes
Limitation of inductive shutdown voltage to	Typ. (2L+) -47 V
Controlling a digital input	No
Switching capacity of the outputs	
• on lamp load, max.	10 W

<b>Load resistance range</b>	
• lower limit	12 Ω
• upper limit	1 kΩ
<b>Output voltage</b>	
• for signal "1", min.	L+ (-2,0 V), current sourcing switch: L+ (-1,5 V), voltage drop on current sinking switch: max. 0.5 V
<b>Output current</b>	
• for signal "1" rated value	2 A
• for signal "1" permissible range, min.	20 mA
• for signal "1" permissible range, max.	2.4 A
• for signal "0" residual current, max.	0.5 mA; Current-sourcing: max. 0.5 mA; Current sinking: max. 4 mA
<b>Parallel switching of two outputs</b>	
• for uprating	No
• for redundant control of a load	No
<b>Switching frequency</b>	
• with resistive load, max.	30 Hz
• with inductive load, max.	0.1 Hz
• on lamp load, max.	10 Hz
<b>Total current of the outputs</b>	
• Current per module, max.	6 A
<b>Total current of the outputs (per group)</b>	
horizontal installation	
— up to 40 °C, max.	6 A
— up to 55 °C, max.	5 A
— up to 60 °C, max.	4 A
vertical installation	
— up to 40 °C, max.	4 A
<b>Cable length</b>	
• shielded, max.	200 m
• unshielded, max.	200 m
<b>Interrupts/diagnostics/status information</b>	
Diagnostic functions	Yes
<b>Diagnostic messages</b>	
• Wire-break	Yes
• Short-circuit	Yes
<b>Diagnostics indication LED</b>	
• Group error SF (red)	Yes
• Status indicator digital output (green)	Yes
<b>Potential separation</b>	
Potential separation digital outputs	

- between the channels
- between the channels and backplane bus
- Between the channels and load voltage L+

No  
Yes  
No

#### Isolation

Isolation tested with 500 V DC

#### tested with

- Channels against backplane bus and load voltage L+ 1500 V AC

#### Standards, approvals, certificates

##### Highest safety class achievable in safety mode

- acc. to EN 954 4
- Performance level according to ISO 13849-1 e
- SIL acc. to IEC 61508 SIL 3

#### Dimensions

Width 30 mm

Height 81 mm

Depth 52 mm

#### Weights

Weight, approx. 85 g

**last modified:** 03/09/2017