

65MM TERMINAL MODULE FOR ET200S HIGH FEATURE LINE STARTER/LINE DIR.STARTER-STARTER WITH SUPPLY CONNECTOR



General technical data:

Product designation		Terminal module
Product type designation		TM-DS65-S32-01 FS L
Design of the product		for DS1e-x and DSS1e-x, with energy bus infeed, with caps
Mounting height	mm	290
Installation width	mm	65
Installation depth	mm	100
Protection class IP		IP20
Insulation voltage rated value	V	690
Operating voltage		
• at AC rated value	V	500
Surge voltage resistance rated value	V	6 000
Operating current rated value	A	50
Operating frequency		
• 1 rated value	Hz	50
• 2 rated value	Hz	60
Type of connectable conductor cross-sections		
• solid		1x 10 mm <sup>2</sup> , 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )

- finely stranded with core end processing
- at AWG conductors
  - solid
  - stranded

	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), acc. to IEC 60947
	2x (14 ... 10)
	2x (14 ... 10)

**Installation/ mounting/ dimensions:**

<b>Size of the screwdriver tip</b>		Standard screwdriver Size 2
Tightening torque with screw-type terminals	N·m	2 ... 2.5

**Further information**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK1903-0AK00>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-0AK00>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RK1903-0AK00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1903-0AK00&lang=en)

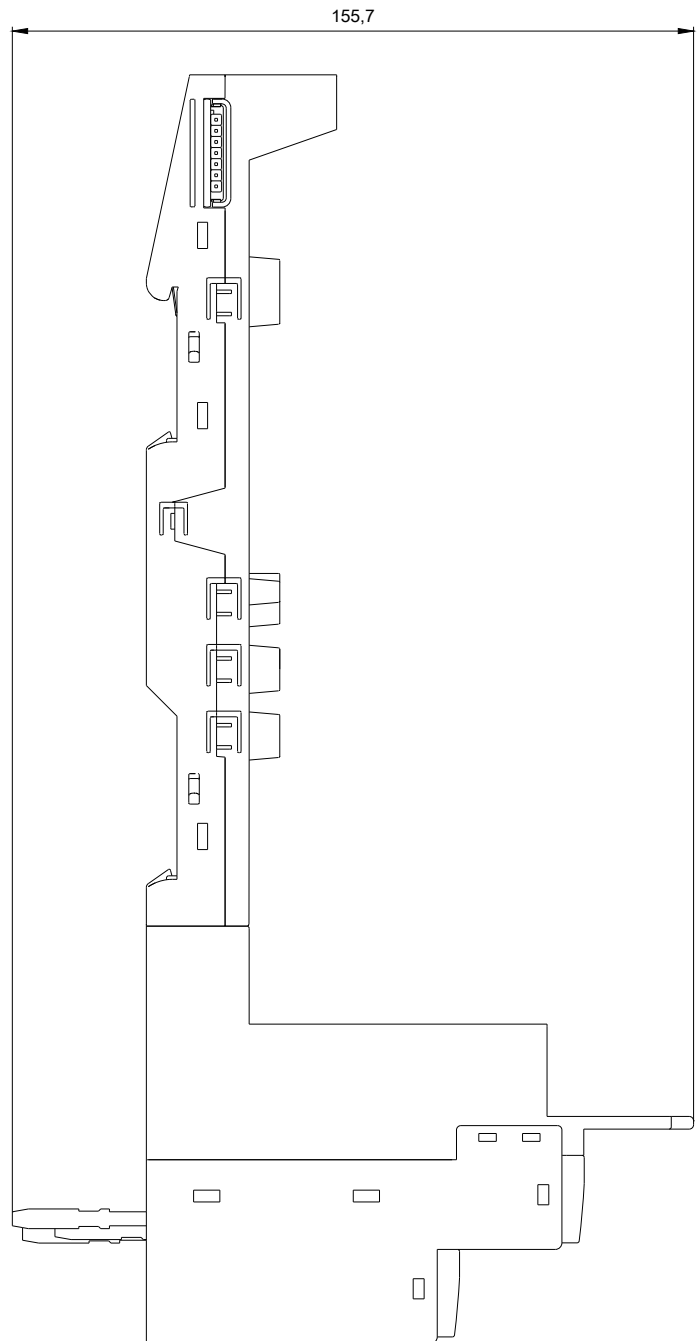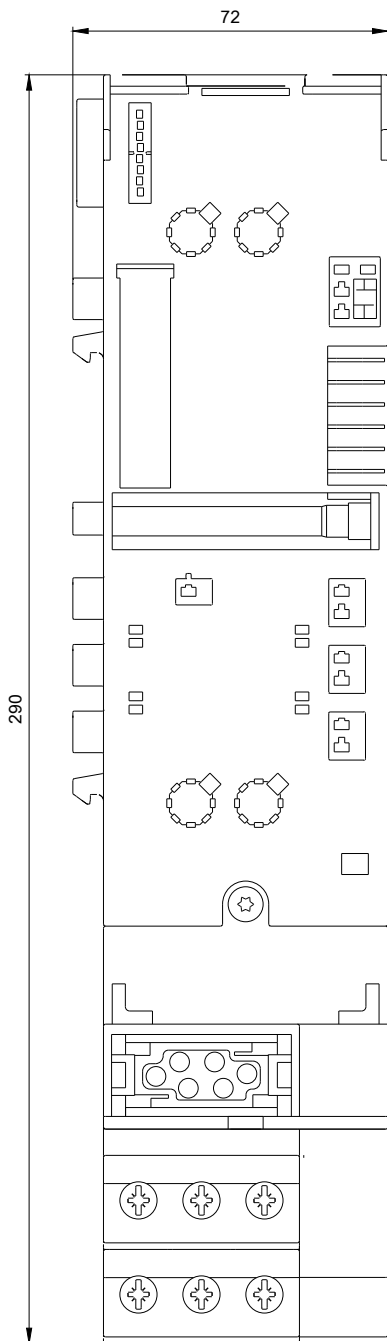

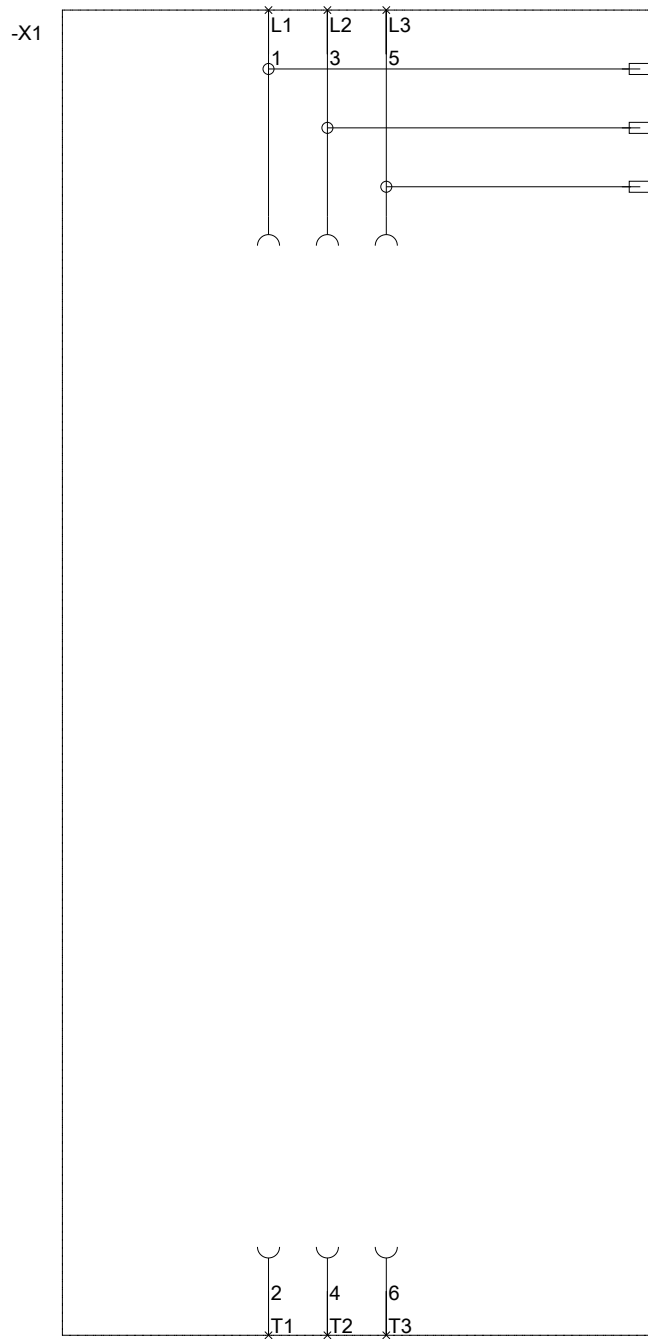

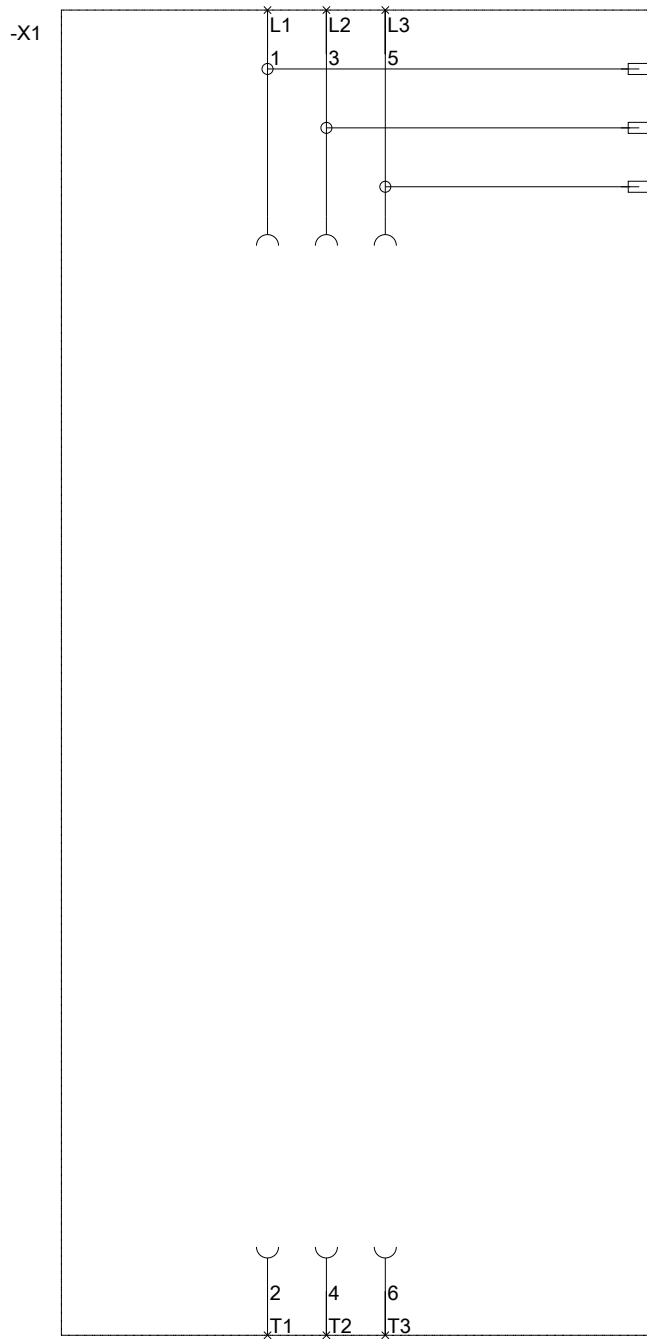

last modified:

07/27/2017