

ECOFAST SOFT STARTER R2SS FOR VARIOUS SPEEDS AS-
INTERFACE UP TO 1.5 KW POWER 2 PARAMETRIZABLE SPEED
BRAKE CONTROL



General technical data:

Design of the product	reversing starter
Product function Bus communication	Yes
Protocol is supported	
• AS-interface protocol	Yes
• PROFIBUS DP protocol	No
Product component Motor brake output	Yes
Type of assignment	1
Width	130 mm
Height	250 mm
Depth	107 mm
Equipment marking acc. to DIN EN 61346-2	Q
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	A

Control circuit/ Control:

Type of voltage	DC
Control supply voltage	
• at DC rated value	
— minimum	20.4 V

— maximum

28.8 V

Main circuit:

Type of the motor protection	full motor protection
Design of the switching contact	solid-state
Design of short-circuit protection	fuse
Operating voltage rated value	
• minimum	400 V
• maximum	500 V
Operating power at AC-3 at 400 V rated value	1 500 W
Operating power for three-phase motors at 400 V at 50 Hz	0.06 ... 1.5 kW
Adjustable pick-up value current of the current-dependent overload release	
• initial value	0.6 A
• Full-scale value	4 A
Maximum short-circuit current breaking capacity (Icu) at 400 V rated value	100 kA





Connections/ Terminals:

Type of electrical connection for main current circuit	tab terminals
--	---------------

Ambient conditions:

Protection class IP	IP65
Ambient temperature during operation	-20 ... +40 °C

Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
 UL		 EG-Konf.	 ASi
		Type Test Certificates/Test Report	Environmental Confirmations

other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1323-6ES81-3AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1323-6ES81-3AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1323-6ES81-3AA3&lang=en

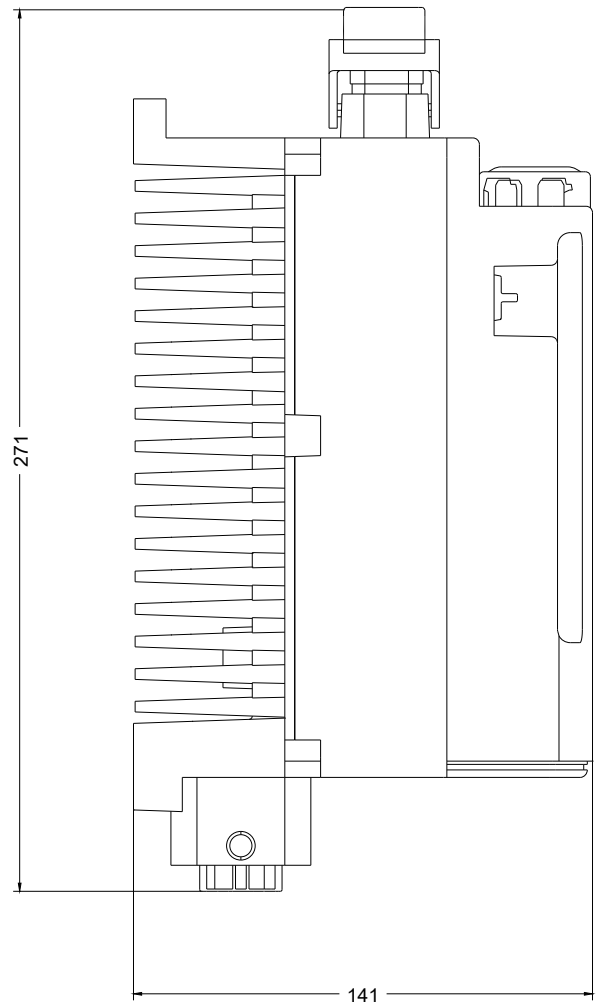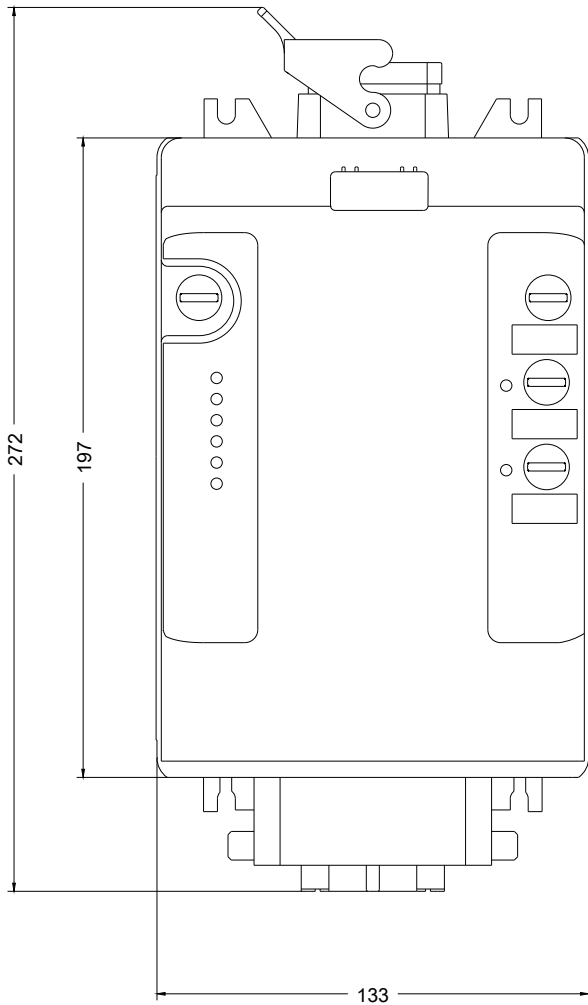

last modified:

07/29/2017