

130MM TERMINAL MODULE FOR ET200S HIGH  
FEATURE REVERSE STARTER, WITHOUT SUPPLY  
CONNECTION

## General technical data:

Product designation		Terminal module
Product type designation		TM-RS130-S31-01 S
Design of the product		for RS1e-x, with energy bus bushing
Mounting height	mm	290
Installation width	mm	130
Installation depth	mm	100
Protection class IP		IP20
Insulation voltage rated value	V	690
Operating voltage		
• at AC rated value	V	500
Surge voltage resistance rated value	V	6 000
Operating current rated value	A	50
Operating frequency		
• 1 rated value	Hz	50
• 2 rated value	Hz	60
Type of connectable conductor cross-sections		
• solid		1x 10 mm <sup>2</sup> , 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )
• finely stranded with core end processing		2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), acc. to IEC 60947
• at AWG conductors		
— solid		2x (14 ... 10)
— stranded		2x (14 ... 10)

## Installation/ mounting/ dimensions:

Size of the screwdriver tip		Standard screwdriver Size 2
Tightening torque with screw-type terminals	N·m	2 ... 2.5

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK1903-0AL10>


### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1903-0AL10>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RK1903-0AL10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1903-0AL10&lang=en)

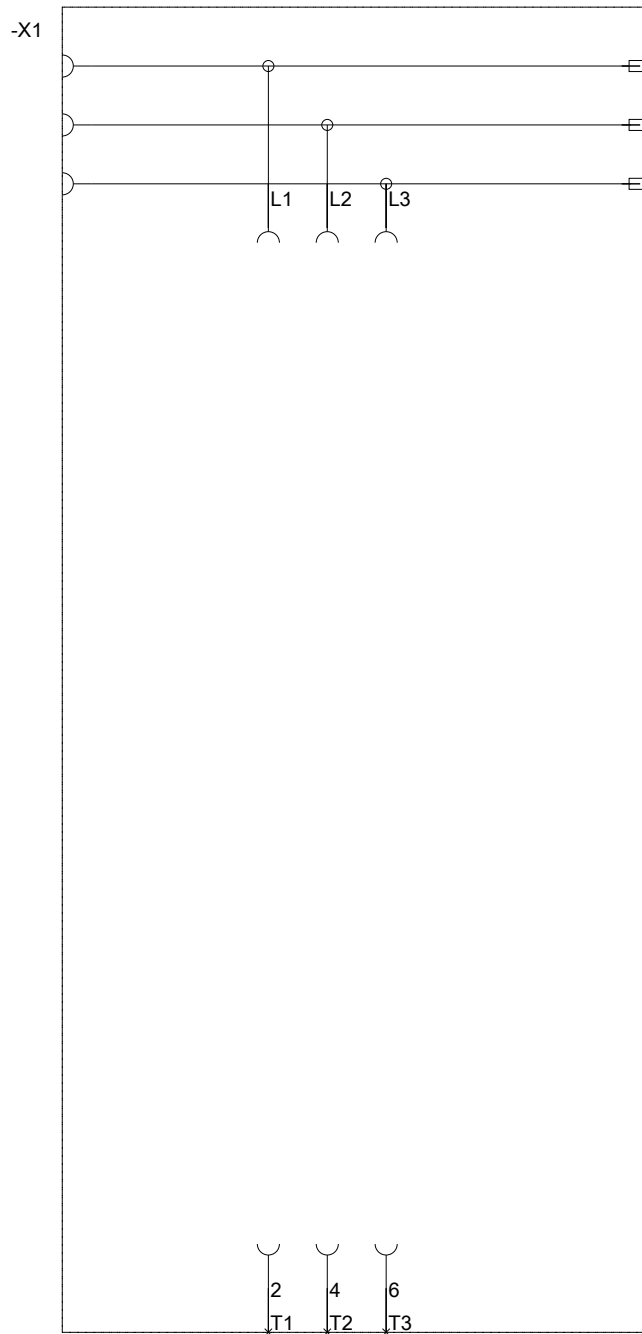

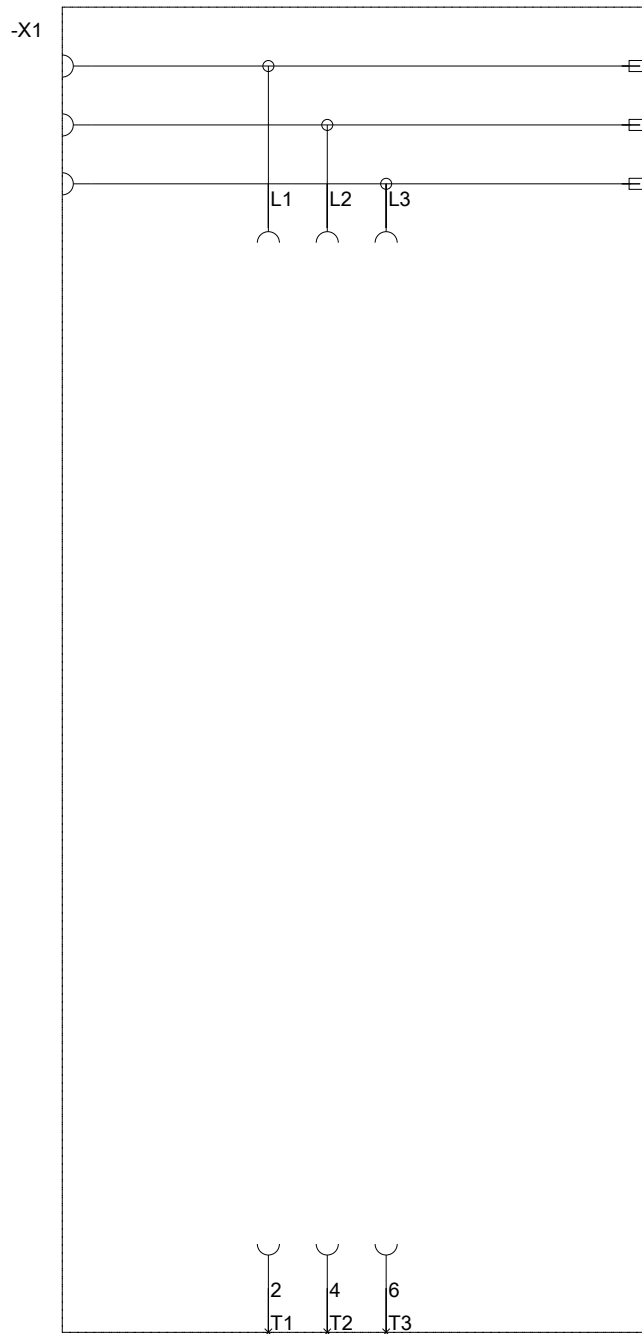

last modified:

07/27/2017